



FOR USE IN APPLICATIONS WHERE REMOVABLE GLAZING IS REQUIRED

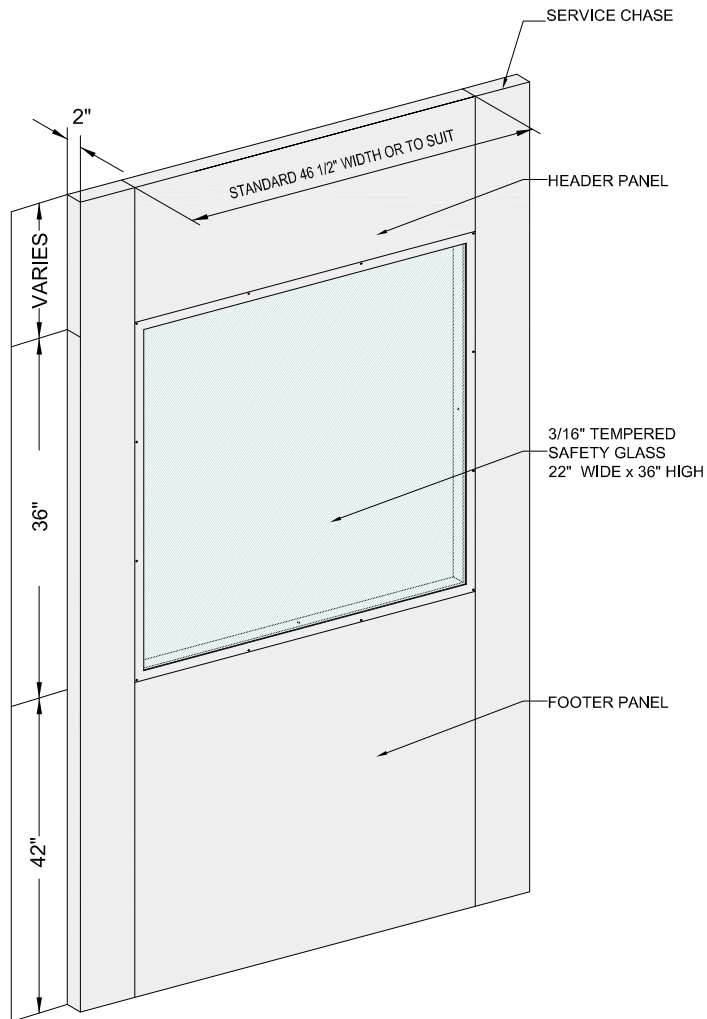

TYPICAL WINDOW ELEVATION

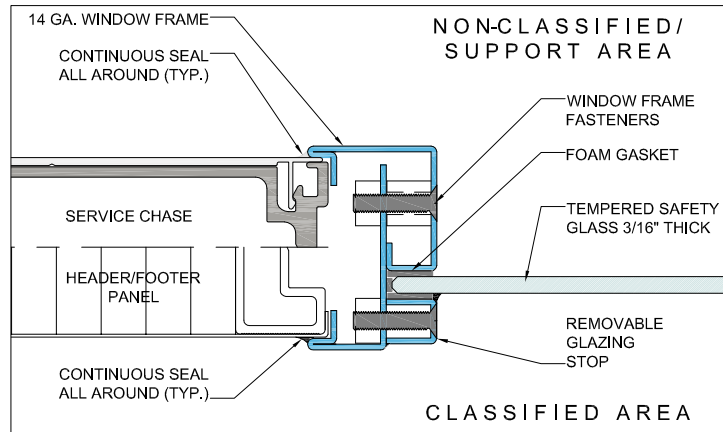

PARTIAL SECTION

NOTES:

1. WINDOW FRAMES ARE CONSTRUCTED OF 14 GA. BREAK-FORMED ALUMINUM, WELDED AT CORNERS, c/w REMOVABLE GLAZING STOPS, ALL EXPOSED SURFACES FINISHED IN POWDER-COAT PAINT (COLOUR: WHITE), c/w 3 / 16" THICK TEMPERED SAFETY GLASS ONE SIDE
2. STANDARD GLAZING UNIT SIZE: 46 1/2" WIDE x 36" HIGH
3. OPTIONAL TINTED FILM AVAILABLE
  - NO TINT
  - YELLOW
  - RED
 (CHECK WITH FACTORY FOR E.M.S. TRANSMISSION WAVELENGTH)

3	GENERAL REVIEW	OCT 06	P.F.
2	GENERAL REVIEW	SEPT 05	N.L.L.
1	ORIGINAL ISSUE	17 AUG 03	P.F.
REV	DESCRIPTION	DATE	DRAWN



INTRODUCTION TO MODULAR CLEANROOMS AND CONTAINMENT FACILITY SYSTEMS

Drawing Title: SINGLE-SIDED REMOVABLE GLAZING

Drawn By	P.F./M.L.	Checked By	P.F.	Scale	AS NOTED	Date	20 NOV. 03
Issue	-----	Job Number	-----	Revision Number	-----	CRW3-15	
Quantity	---						

UNLESS OTHERWISE NOTED, THIS DRAWING REMAINS THE PROPERTY OF MICROZONE CORPORATION. IT SHALL NOT BE REPRODUCED OR USED FOR MANUFACTURE, DESIGN OR CONSTRUCTION WITHOUT THE EXPRESSED WRITTEN APPROVAL BY THE OWNER. THE ACCEPTOR, BY ACCEPTING THIS DRAWING, ASSUMES THE CUSTODY THEREOF AND UNDER THE ABOVE TERMS AGREES NOT TO ALLOW ITS USE BY UNAUTHORIZED PERSONS, WITHOUT INCURRING LIABILITY FOR FINANCIAL PENALTIES BY LAW.